



FLEXLOCK ADVANTAGE

FLEXLOCK
BY ALLIANCE DESIGNER PRODUCTS
Flex-lock.com

JOINTING MATERIAL



FLEXLOCK ULTRA SAND

For concrete paver joints up to 2" in drainage and overlay applications

IDEAL FOR

- Residential and Commercial use
- Drainage and overlay applications
- Concrete pavers, natural stones and wet cast products
- Streetscapes, commercial work, steep slopes, pool areas, patios, walkways, driveways, parking areas and more

GRAPHITE GREY

SANDY BEIGE

FLEXLOCK SAND

For concrete paver joints up to 1" in drainage applications

IDEAL FOR

- Residential use
- Drainage applications
- Concrete pavers, wet cast products
- Sloped areas, pool areas, patios, walkways, driveways and more

GRAPHITE GREY

SANDY BEIGE

EUROSTONE BOND

For natural stone paver joints up to 1.5"

IDEAL FOR

- Residential and commercial use
- Drainage and overlay applications
- Natural stone and cobble pavers
- Stone roads, piazzas, driveways, pathways and stone apron driveways

SLATE GREY



FLEXLOCK DUST

Natural stone or wet cast stone joints 1/2" to 6" wide

IDEAL FOR

- Residential use
- Pedestrian use
- Patios, walkways, pool areas and more

STONE GREY

SAHARA BEIGE



GATOR AQUA ROCK

Graded ASTM No.9 granite stone

IDEAL FOR

- Residential and commercial use
- Permeable paver joints and bedding material
- Driveways, parking lots, patios and more

GRANITE GREY

G2 POLYMERIC SAND



FLEXLOCK ULTRA SAND G2

For joints up to 4" in drainage and 2" in overlay applications

IDEAL FOR

- Residential and commercial use
- Drainage, overlay and Gator Base applications
- Concrete pavers, natural stones, wet cast products and clay pavers
- Streetscapes, commercial work, steep slopes, pool areas, patios, walkways, driveways and parking areas

FEATURES

- Drainage applications, **Rain safe 15 minutes** after water activation
- Overlay applications, **Rain safe 24 hours** after water activation

GRAPHITE GREY

SANDY BEIGE

IVORY

ONYX BLACK



FLEXLOCK SAND G2

For joints up to 2" in drainage applications

IDEAL FOR

- Residential use
- Drainage applications
- Concrete pavers, natural stones, wet cast products and clay pavers
- Sloped areas, pool areas, patios, walkways, driveways and much more

FEATURES

- Drainage applications, **Rain safe 15 minutes** after water activation

GRAPHITE GREY

SANDY BEIGE

GATOR NITRO JOINT SAND

4 BEAUTIFUL COLORS

BLACK

SILVER

GREY

BEIGE



STRENGTH FROM TOP TO BOTTOM



PERMEABLE JOINT SAND

Pail size 40 lb

Gator Nitro Sand is the ideal air cure, permeable jointing material. It is a ready-to-use mixture of calibrated sand and proprietary resin formula which cures when exposed to air, hardening from top to bottom of the joint. The product can be installed in wet or dry weather.

IDEAL FOR

- Residential and commercial pedestrian applications
- Porcelain tile with Gator Tile System
- Natural and wetcast stones
- Concrete pavers
- Residential driveway with interlocking pavers
- Patios, pool areas, walkways and driveways
- Drainage, open grade base and Gator Base Systems

FEATURES

- Proprietary resin formula
- Apply rain or shine
- Joint width from 3/16" to 2" (5 mm to 50 mm)
- Coarser jointing sand
- Strength from top to bottom
- Permeable



	Minimum joint width	Maximum joint width	Joint depth	Pedestrian	Vehicular
Porcelain tile with Gator Tile System	1/8" (3 mm)	1/4" (6 mm)	3/4" (20 mm)	✓	✗
Stones	3/16" (5 mm)	2" (50 mm)	1" (25 mm)	✓	✗
Interlocking concrete pavers	3/16" (5 mm)	2" (50 mm)	2-3/8" (60 mm)	✓	✓

Note: Outdoor porcelain tiles must be installed using Gator Tile System with minimum joint depth of 3/4" (20 mm).

GATOR NITRO-X FINE JOINT SAND

NEW




RAPID FLOW TECHNOLOGY



FINE JOINT SAND

Gator Nitro-X Fine Joint Sand is a ready-to-use mixture of calibrated sand and improved proprietary resin formula for joints as tight as 1/8" (3 mm) which cures when exposed to air, hardening from top to bottom of the joint. The product can be installed in wet or dry weather.

Pail size 27.5 lb

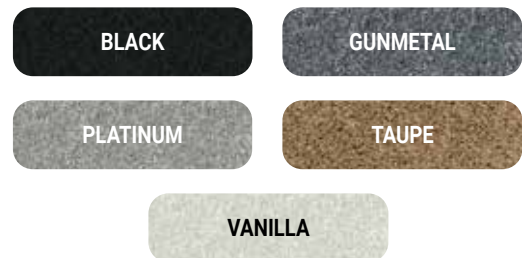

IDEAL FOR

- Residential and commercial pedestrian applications
- Porcelain tile with Gator Tile System
- Natural and wetcast stones
- Concrete pavers
- Residential driveway with interlocking pavers
- Patios, pool areas, walkways and driveways
- Drainage base and Gator Base Systems

Note: Outdoor porcelain tiles must be installed using Gator Tile System with minimum joint depth of 3/4" (20 mm).

FEATURES

- Rapid Flow Technology
- Fast and simple installation
- Apply rain or shine
- Joint width from 1/8" to 2" (3 mm to 50 mm)
- 5-year limited warranty



- Fine gradation jointing sand
- Low permeability
- Strength from top to bottom

NEW



NO MOWING - NO WATERING

ALLIANCE GATOR proves its name and reputation in offering superior quality hardscape products!
Now introducing the highest quality artificial turf the industry has to offer!



GATOR XTURF **PREMIUM BLEND**
ARTIFICIAL TURF

RESIDENTIAL AND COMMERCIAL

- ✓ HEAVY TRAFFIC
- ✓ 2 COLORS AVAILABLE
- ✓ 20-YEAR WARRANTY



C shape blade

XTRA

- COMFORTABLE
- DURABLE
- SOFT TOUCH

GATOR XTURF **CLASSIC BLEND**
ARTIFICIAL TURF

RESIDENTIAL APPLICATIONS

- ✓ MODERATE TRAFFIC
- ✓ 2 COLORS AVAILABLE
- ✓ 20-YEAR WARRANTY



W shape blade

- COMFORTABLE
- DURABLE
- SOFT TOUCH


GATOR XTURF **PUTTING GREEN BLEND**
ARTIFICIAL TURF

RESIDENTIAL AND COMMERCIAL

- ✓ DURABLE
- ✓ ELEGANT
- ✓ LOW MAINTENANCE
- ✓ 1 COLOR AVAILABLE
- ✓ 20-YEAR WARRANTY



GATOR FOREST GREEN



GATOR LIME GREEN



GATOR FOREST GREEN



GATOR LIME GREEN



GATOR SUMMER GREEN

AVAILABLE SIZES:

- 7.5' X 25'
- 7.5' X 50'
- 15' X 33'
- 15' X 100'

AVAILABLE SIZES:

- 7.5' X 25'
- 7.5' X 50'
- 15' X 33'
- 15' X 100'

AVAILABLE SIZES:

- 7.5' X 25'
- 15' X 25'



GATOR SEAM TAPE



GATOR XTURF SEAM TAPE is used to join two adjacent rolls of GATOR XTURF. A 6" extremity section of each XTURF roll is bonded to the SEAM TAPE with the use of GATOR BLOCK BOND XP Glue.

AVAILABLE SIZES: 12" X 100' • 12" X 300'



NEW



HELPS KEEP TURF BLADES UPRIGHT.

GATOR XTURF INFILL SAND FOR ARTIFICIAL TURF



- Holds artificial turf in place
- Ideal gradation for drainage
- Keeps artificial turf cooler
- Engineered for all artificial turf
- Natural products
- Safe for children and pets
- Environmentally safe
- Mesh size 20-40



- Holds artificial turf in place
- Superior gradation for drainage
- Rounded, green coated natural sand
- Resists mildew
- Reduces risk of injury
- Safe for children and pets
- Environmentally safe
- Mesh size 12-20



- Absorbs ammonia from animal urine
- Specific gradation for better performance
- Holds artificial turf in place
- Keeps artificial turf cooler
- Natural products
- Safe for children and pets
- Environmentally safe
- Mesh size 14-20

Helps keep turf blades upright. Provides a rich, thick and natural healthy appearance.

Provides a rich, thick and natural healthy appearance. Gator Green Infill will match or blend in with all artificial turf colors.

Gator Zeo-White is made of Zeolite which is composed of microporous minerals.

HELPS Prevent Reduce Control **FOUL ODORS**

NEW



To Hold Gator XTurf & Seam Tape in Place

730-740 6" Nails
per box of 50 lb

250-260 10" Nails
per box of 50 lb



XP ODOR REMOVER
for artificial turf

XTRA PERFORMANCE FOR SEVERE MESS
When it comes to clean-up not all pet messes are created equal.

- Deodorizes with a light fresh scent
- Gets your artificial grass smelling clean again
- **ENZYMATIC FORMULA** that continues to work as long as any bio-based mess is present



GATOR EDGE | GATOR XTREME EDGE



GATOR EDGE RIGID AND FLEX

FEATURES

- Easy to use and quick to install
- Great lateral support
- Made with 100% polypropylene or polyethylene for strength and flexibility
- Gator Edge Rigid and Flex can be interconnected with the "Twist & Lock" system
- For thin pavers and slab applications, use Gator Edge Mini
- For tile applications, use Gator Tile Edge
- Gator Screws are used to fasten Gator Tile, Mini, Flex or Rigid edge to the Gator Base
- Edge can be fastened with nails



GATOR EDGE RIGID
1 3/4" (45 mm) height
2 5/8" (67 mm) depth




GATOR EDGE FLEX
1 3/4" (45 mm) height
2 5/8" (67 mm) depth



GATOR MINI EDGE
1" (25 mm) height
2 1/4" (56 mm) depth



GATOR TILE EDGE
5/8" (15 mm) height
2 1/4" (56 mm) depth



Gator Screws are used to fasten Gator Tile, Mini, Flex or Rigid edge to the Gator Base

GATOR BASE SCREWS

50 screws per pack | 20 packs per box

XTREME EDGE

The Ultimate reinforced 3D Micro-Fiber mesh Structural Edge.

IDEAL FOR

- Drainage, open-graded and permeable applications
- Overlay and Gator Base applications
- Pedestrian and vehicular use
- Concrete pavers, slabs, natural and wet cast stone applications


FEATURES

- High-performance polymers for added strength
- Reinforced with 3D micro-fiber mesh
- Continuous lateral support matrix
- Freeze and thaw-resistant

XTREME EDGE VS CONCRETE MIX

- 2X** Stronger
- 2X** Faster setting time
- Easier and faster to install

APPLICATIONS

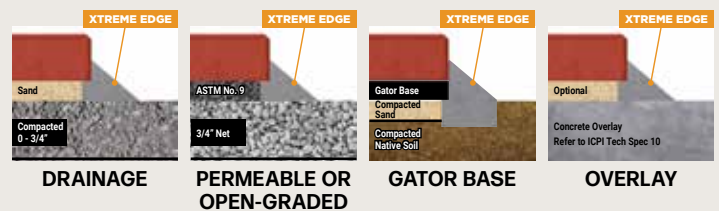




NEW

X^{TRA}

- LATERAL SUPPORT
- LIGHT
- STRONG

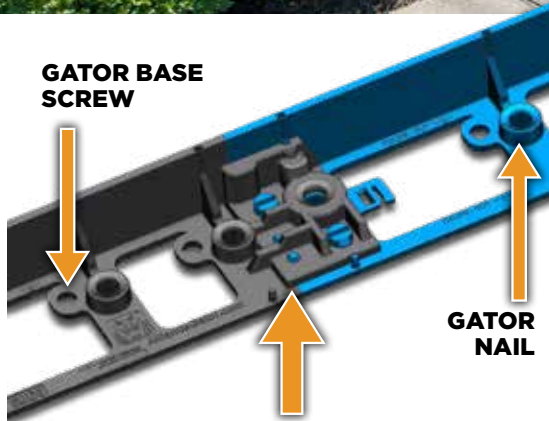

GATOR BASE SCREW

GATOR NAIL

"SNAP & LOCK" SYSTEM

IDEAL FOR

- Patios, walkways, alleys
- Designed for straight or curved installation
- Ease of use
- Quick to install "SNAP & LOCK" system
- Gator Base and compact aggregates base foundations



FEATURES

- 4 feet long
- 1 5/8" height
- 2 3/4" depth
- "Snap & Lock" System
- Curved or straight edges
- Easy to carry
- Easy storage
- Less waste 4'
- 12 packs X 2 edges = 24 units = 96 lin. ft. = 1 bundle
- UV-resistant
- Use with Gator Nails
- Use Gator Base Screws in Gator Base application



USE GATOR BASE SCREWS IN GATOR BASE APPLICATION



EASY TO CARRY AND STORE



CURVED OR STRAIGHT-EDGED



USE WITH GATOR NAILS

GATOR BASE



Pavers

Gator Base

Compacted Sand or
ASTM No.9 Stones

Gator Fabric GF4.4

Compacted Native Soil

The most knowledgeable landscapers have quickly understood the power of the Gator Base, which will save you more than 20% in labor on any pedestrian project such as patios, sidewalks, pool surroundings and more.

Join the elite who have understood the efficiency and profitability Gator Base will bring to your business. Contact us to take advantage of the benefits offered by Gator Base.

Knowledge is power!

THE GATOR BASE ADVANTAGES

- Jobs are completed 20% faster than the drainage way
- Reduces needless excavation
- Reduces the effects of freeze and thaw cycles
- Less destruction on property during installation phase
- The perfect product for easy or hard-to-access areas
- Equivalent to a drainage granular base under dynamic loads

IDEAL FOR:

- Pedestrian applications
- Patios, pool decks, pathways
- Seat walls, fire pits applications
- Can be applied with heated paving system up to 122°F (50°C)
- Gator Tile System


WHAT IS GATOR BASE?

- Manufactured using lightweight high-density polypropylene
- Has an R-Value of 3.6 which acts as a thermal blanket
- Is extremely durable and will not degrade in the ground
- Equivalent to 288 lb (130 kg) of crushed stone
- * Designed with a tongue and groove system LOCK-N-GO
- ** Replaces 6" (15 cm) of compacted crushed stone
- *** Evacuates water through channels and holes
- **Designed for pedestrian applications only**



LOCK-N-GO SYSTEM

Gator Base, with its interlocked paneling system, distributes dynamic loads to a very wide area practically eliminating any pressure on the ground.



**** **DIMENSIONS: 23.5" X 35.5" (60 CM X 90 CM)**

Under License from Brock International Patented and Patents Pending: www.brockpaverbase.com

IT'S A BETTER INSTALLATION

4equals5.com




HOW DOES GATOR BASE WORK?

GATOR BASE REPLACES 6" (15 CM) OF CRUSHED STONE!

The excavation needed for both paver and natural stone applications of the OLD WAY vs the GATOR BASE WAY. Adding the pavers' or natural stones' height (1 1/8" to 3 1/8" [2.8 to 8 cm]) of Gator Base and bedding sand will determine the total excavation depth needed. Adding a second bedding sand layer of C-33 1" (25 mm) on top of the Gator Base is also an accepted installation method.

GATOR BASE WAY VS. THE OLD WAY

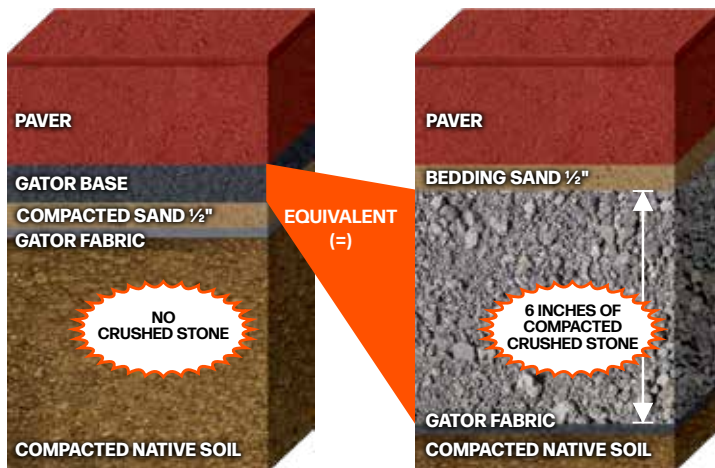

**** GATOR BASE REPLACES 6" OF COMPACTED CRUSHED STONE!**

WHY USE GATOR BASE?

ENGINEERING

*** Gator Base panel is equipped with channels for water evacuation along a 1 degree slope and drainage holes. Gator Base is made of durable engineered material that will last forever.


OVERLAY APPLICATION

Allows the evacuation of water through 2" (5 cm) drainage holes filled with 1/4" or 3/8" (6 mm or 1 cm) clean stone every 10 ft (3 m) starting at the lowest point. Cover every hole with Gator Fabric GF4.4.


SEATING WALL, FIRE PIT OR PAVER APPLICATIONS

When constructing a seating wall or fire pit, the Gator Base should extend the perimeter at least 12" (30 cm) beyond the outside edge of the blocks and 6" (15 cm) when installing pavers. Secure the Gator Edge to the sides of the seating wall blocks or pavers with Gator Base screws at every second hole to prevent any lateral movement.


SEATING WALL WITH PAVERS

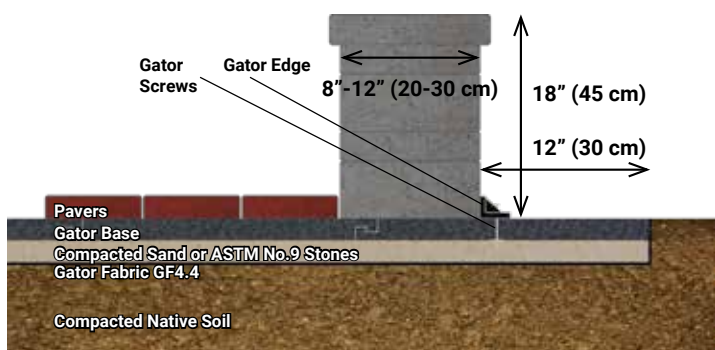

FIRE PIT INSERT

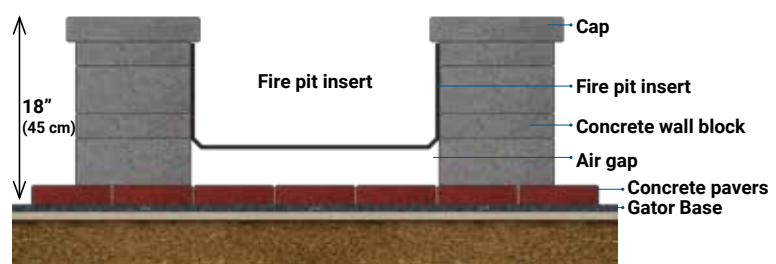

GATOR BASE SAVES HOURS OF WORK!

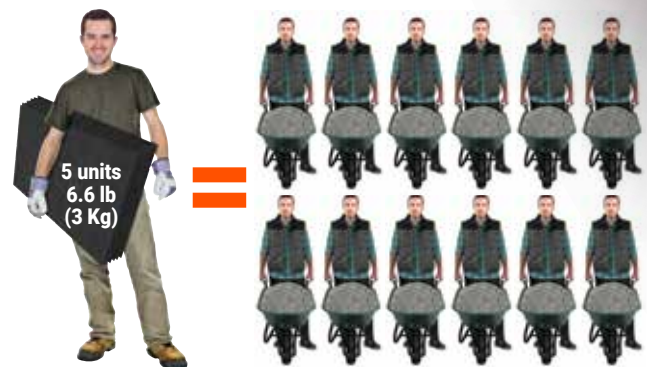

**6.6 LB (3 KG)
GATOR BASE**

**1440 LB (653 KG)
OF CRUSHED STONE**

- 5 units of Gator Base covers 29.4 sq.ft. (2.7 sq.m.) and weighs 6.6 lb (3 kg) = **Installed within minutes!**
- 6" (15 cm) of compacted crushed stone covers 29.4 sq.ft. (2.7 sq.m.) filled with 6" (15 cm) and weighs 1440 lb (653 kg) = **Hours of work!**

WHEN AND WHERE TO USE GATOR BASE?

- Installing large format pavers and slabs
- Staging pavers throughout Gator Base
- Avoid stepping on setting bed
- Causing less disturbance and destruction to property
- Tolerant towards rain showers
- Material storage is prohibited in streets
- Application and installation of the Gator Tile system (see page 12)

**** FINAL DIMENSIONS AT INSTALLATION:

- 5.79 sq ft (0.53 sq m)
- 23.5 in x 35.5 in (60 cm x 90 cm)
- 3/4 in (1.90 cm) thick
- Weight per panel: 1.32 lb (0.60 kg)

GATOR TILE SYSTEM

INNOVATIVE AND DURABLE SYSTEM FOR OUTDOOR PORCELAIN TILE INSTALLATION



WHAT IS THE GATOR TILE SYSTEM?

The Gator Tile System is a comprehensive line of products to help you install outdoor porcelain tiles with precision, beauty and long-lasting stability. Easy to use, saving you overall installation time and labor costs while giving you the most professional-looking results.

WHY WOULD I USE IT?

- Facilitates the installation of outdoor porcelain tiles
- Easiest outdoor tile installation system
- To complete the job 20% faster
- To have an insulation with a 3.6 R-value
- To replace an equivalence of 6" (15 cm) of crushed stone
- To have a lock-in system with glue, spacers and tile, creating a monolithic surface

WHERE WOULD I USE IT ?




- Ideal for large-format porcelain tiles
- Residential applications
- All pedestrian uses: patio, pool deck, walkway

HOW WOULD I USE IT?

- To replace a concrete slab
- One Gator Base panel replaces the equivalent of 288 lb (130 kg) of crushed stone
- It is designed with a tongue-and-groove system
- It evacuates water through channels
- It is environmentally friendly and 100% recyclable



The **GATOR TILE SYSTEM** is the best innovative and comprehensive system for porcelain tile installations. This system offers a line of products to help you install outdoor porcelain tiles with precision, beauty and long-lasting stability. It is easy to use, saving you overall installation time and labor costs while giving you the most professional-looking results.

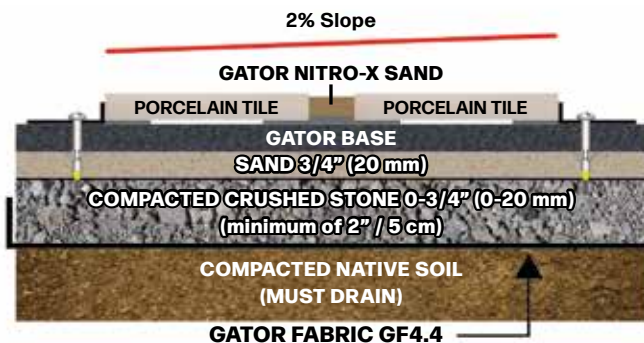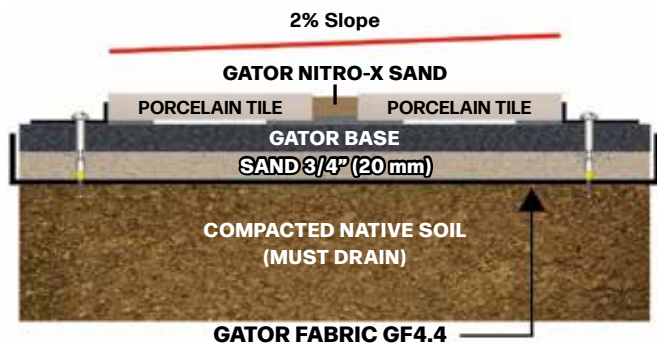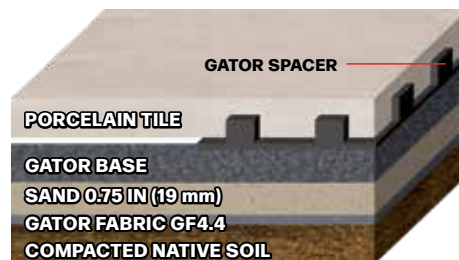

GATOR NITRO-X FINE JOINT SAND IS NOW ONE OF THE 7 COMPONENTS OF THE GATOR TILE SYSTEM





NEW
NOW FOR
ARTIFICIAL TURF

GATOR BLOCK BOND XP


XTRA PERFORMANCE POLYURETHANE ADHESIVE

FORMULATED FOR

- Overlays and pool copings
- Steps and wall caps
- Fire pits up to 204°C (400°F)
- Retaining walls
- Masonry units
- Wet cast and natural stones
- Concrete pavers and bricks
- Dry and damp surfaces
- Artificial turf

FASTEST-SETTING HARDSCAPE ADHESIVE !

XTRA FAST CURE TIME
BOND STRENGTH
DURABILITY

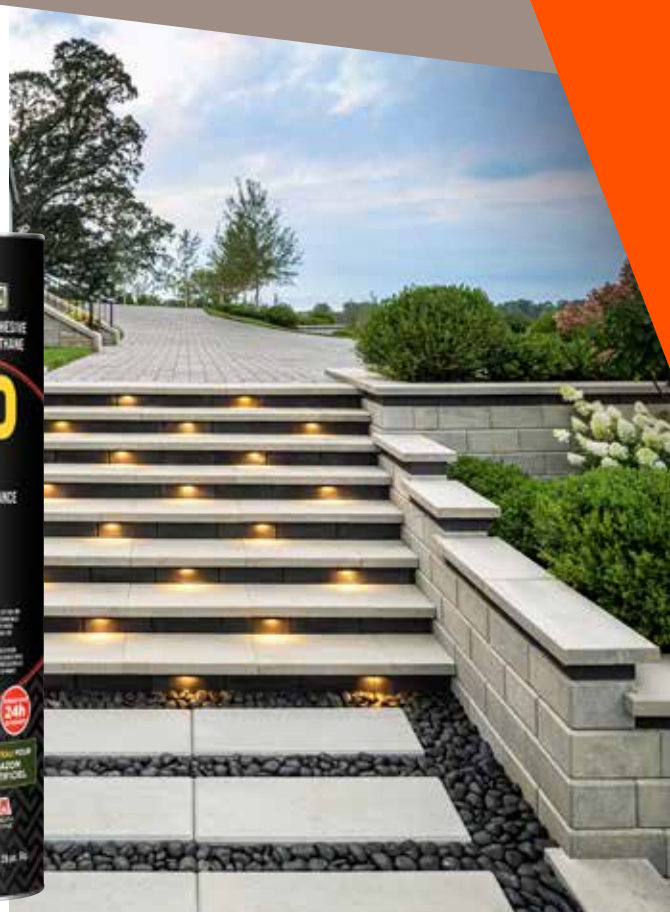

GATOR ROCK BOND

Gator Rock Bond is a single-component binder that creates a durable, permeable, and decorative surface when mixed with riverstone. Great for garden pathways where erosion and drainage are a concern. Offered in a kit including liquid binding agent and rock or liquid binding agent only.

FEATURES

- Porous and permeable
- Keeps stones in place
- Reduces maintenance and clean-up
- Durable in extreme conditions



GATOR GRID AND GATOR FABRIC



SELECT THE RIGHT GATOR GRID FOR YOUR HARDSCAPE PROJECT




GG 30-30
2,052
lbf/ft

GG 50-50
3,420
lbf/ft



BIAXIAL AND PLIABLE

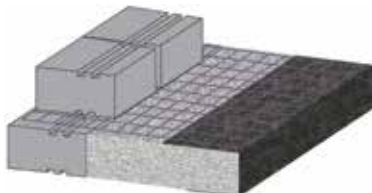

GATOR GRIDS STAYS FLAT WHEN UNROLLED

**NO MEMORY
STAYS FLAT LIKE NO OTHER!**

APPLICATIONS

- Raised patio internal structures
- Retaining wall structures
- Multi-level wall structures
- Roadway structure
- Parking space structure
- General landscape
- Soil stability
- Erosion control

FEATURES

- Biaxial: can be installed in both directions
- Pliable, stays 100% flat during installation, will not curl up on itself
- Anti-ageing
- High tensile strength
- Adds strength, stability and longevity
- Easily combined with gravel and soil
- Helps reduce stress and structural load transfer
- Soil separation for added stability

Gator Grid Placement Disclaimer

The soil composition may vary from location to location. Global stability of the soil has not been considered. It is the owner's responsibility to take into consideration the soil parameters indicated on the label and to ensure that the soil's properties meet construction standards. A soil analysis must be done before starting any wall project. Before the construction of your segmental wall and before using any type of Gator Grid and establishing the placement, consult a qualified local engineer and obtain a stamped plan. To ensure the structural integrity of your segmental retaining wall, follow manufacturer instructions and installation steps for the construction of your wall. These placement tables are not to be used on multi-tiered walls or in areas with excess water runoff, seepage or springs, unless first otherwise confirmed by a qualified local engineer. Additional Gator Grid than what appears on the label may be required in your application. This document should not be construed as engineering advice. We assume no liability of any kind if the instructions in the present disclaimer are not followed or if the owner's use of the product is different than the one for which it is intended.




SELECT THE RIGHT GATOR FABRIC FOR YOUR HARDSCAPE PROJECT



GF3.5 NON-WOVEN
PATIOS AND WALKWAYS

GF4.4 NON-WOVEN
PATIOS, WALKWAYS
AND DRIVEWAYS




FEATURES

- Hydrophilic, allows high-water flow
GF 3.5 165 gallons per minute per foot
GF 4.4 135 gallons per minute per foot
- Drainage and filtration
- Soil separation
- Erosion control

APPLICATIONS

- Staircases, patios, walkways and driveways
- Retaining wall
- Gator Base applications
- Garden and landscape covering

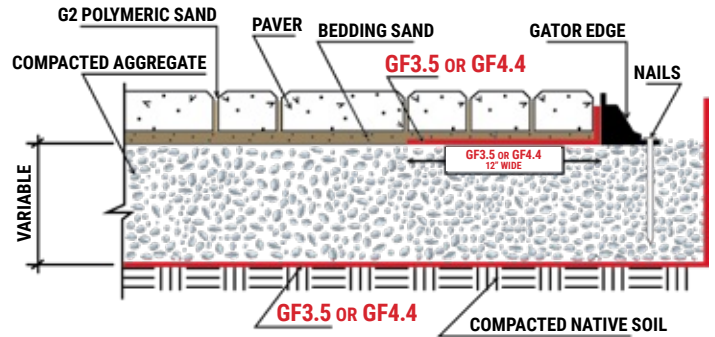

CROSS-REFERENCE CHART FOR GATOR FABRICS AND GATOR GRIDS

Alliance Gator			Comparative Products									
Category	Product	Application	SRW	Tencate	Hanes	Strata	Texel (Lyddal)	Synteen	Tensar	Carthage Mills	Geostar	Dewitt
Gator Fabric	GF 3 (20 years) Spunbond	Separation & Weed Control	SB3	N/A	ProSteel+/ProSilver+	N/A	N/A	N/A	N/A	LX-SB30	N/A	Professional Landscape Fabric (3.0 oz)
	GF 3.5 (80 Lbf) Non-Woven	Drainage & Filtration	LS3	Mirafi 135 N	Terratex no. 3	StrataTex ST-131	TEX-500	N/A	N/A	FX-30HS	Geostar GN 31	DNG 105
	GF 4.4 (100 Lbf) Non-Woven	Drainage & Filtration	NW4	Mirafi 140 NC	Terratex SD/4.5	StrataTex ST-140	TEX-700N	N/A	N/A	FX-40HS	Geostar GN 40	DNG 120
	GF 5 (200lbf) Woven	Stability & separation of subgrade in paver or wall foundations	SS5	Mirafi 500 X	Terratex GS	StrataTex SW-200	SX-90T	N/A	N/A	Slit Film FX-55	GeoWeave 40	DNG 200
	GF 20 (20 years) Polyspun	Separation & Weed Control	Polyspun 15 years	N/A	Pro lon 20 years	N/A	N/A	N/A	N/A	N/A	N/A	Weed-Barrier Pro Black (3 oz)
Gator Grid	GG 30-30 (2052 lbf/ft) Biaxial	Segmental retaining wall, erosion control	3 series Biaxial	Miragrid 2XT Biaxial	Terragrid SX-3030 Biaxial	Microgrid/SG-150 Biaxial	BX-1200 T2 Biaxial	Synteen SF 11 Biaxial	BX-1500 Biaxial	GBX-3030 Biaxial	MG-100 Biaxial	N/A
	GG 50-50 (3420 lbf/ft) Biaxial	Segmental retaining wall, erosion control & more	5 series Uni-Axial	Miragrid 3XT Uni-Axial	N/A	Stratagrid 200 Uni-Axial	BX-1500 T3 Biaxial	Synteen SF 35 Uni-Axial	UX-1100/UX-1400 Uni-Axial	GX-300 Uni-Axial	HP-200 Uni-Axial	N/A


** Disclaimer for all Gator Fabrics

Information regarding the physical properties, performance and permitted use of Alliance Designer Products Inc.'s Gator Fabric products is, to the best of our knowledge, reliable. However, Alliance Designer Products Inc. assumes no liability for the accuracy or completeness of this information or for its ultimate use. As Alliance Designer Products Inc. has no control over methods of use and field conditions, Alliance Designer Products Inc. disclaims all warranties, expressed or implied, including, without limitation, the warranties of merchantability and/or fitness for a particular purpose and as to quality. The final determination as to the appropriateness or suitability of any Gator Fabric product in any particular application rests with the end user and is the end user's sole responsibility. This document should not be construed as engineering advice.

GATOR FABRIC



GF5 WOVEN FABRIC DRIVEWAYS




GF 5
200
lbf

FEATURES

- Reinforcement
- Soil separation
- High tensile strength
- High load capacity
- Extra resistant to punctures and tears

APPLICATIONS

- Driveways and parking lots
- Poor soil foundation reinforcement (clay soils)
- Leveling pad retaining wall foundation
- Permeable foundation applications of driveways, parking spaces and more

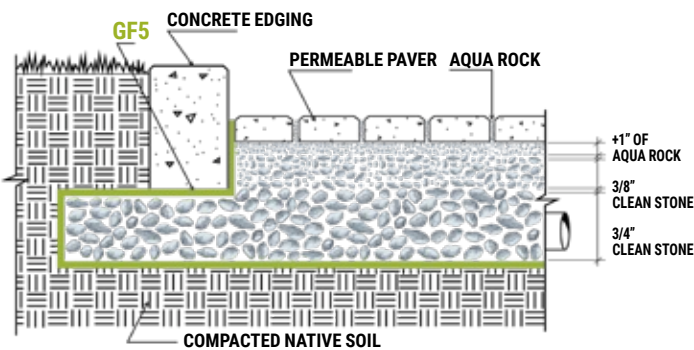

GF20 POLYSPUN FLOWER BEDS



GF 20
20
years

GF 3
20
years

GF3 SPUNBOND GARDEN AND LANDSCAPE COVERINGS

FEATURES

- Specially treated to be hydrophilic
- Easy to cut, tear-resistant
- Inert to biological degradation
- Inert to soil chemicals (alkalis, acids)
- Creates a barrier that reduces weed growth
- Allows water, fertilizer and air to pass through

APPLICATIONS

- Weed control and soil separation
- Flower beds and mulched area
- Garden landscape covering



*DISCLAIMER FOR GF 3, GF 3.5, GF 4.4, GF 5, AND GF 20

Information regarding the physical properties, performance and permitted use of Alliance Designer Products Inc.'s Gator Fabric products is, to the best of our knowledge, reliable. However, Alliance Designer Products Inc. assumes no liability for the accuracy or completeness of this information or for its ultimate use. As Alliance Designer Products Inc. has no control over methods of use and field conditions, Alliance Designer Products Inc. disclaims all warranties, expressed or implied, including, without limitation, the warranties of merchantability and/or fitness for a particular purpose and as to quality. The final determination as to the appropriateness or suitability of any Gator Fabric product in any particular application rests with the end user and is the end user's sole responsibility. This document should not be construed as engineering advice.



EFFLORESCENCE

FEATURES

- Removes efflorescence from the surface of concrete pavers and natural stones
- Cleans pavers prior to sealing
- Removes penetrated dirt
- Restores pavers to their natural color
- No hydrochloric acid in product



SHAMPOO

FEATURES

- Removes penetrated dirt
- Restores pavers to their natural color
- No hydrochloric acid in product



SPRAYER

FEATURES

- Easy to use, provides an accurate water-to-cleaner mix
- Connects directly to your garden hose
- Use with Gator Shampoo or Gator Efflorescence Cleaner



XP OIL & GREASE REMOVER

FEATURES

- No scrubbing, no rinsing, no mess
- Just shake it, spread it on the stain, let it dry and sweep it off
- Easily lifts and absorbs embedded oil stains as it dries from liquid to powder



RUST REMOVER

FEATURES

- Removes the spots caused by steel, water build-up, fertilizer, etc.
- Contains no muriatic acid
- Easy to use

GATOR SEALERS



SOLVENT-BASED SEALERS FOR DRY CAST CONCRETE PAVERS



WET LOOK

- High Gloss
- Vibrant Color Enhancer
- Joint stabilizer
- Film Former



SATIN LOOK

- Low Gloss
- Subtle Color Enhancer
- Joint stabilizer
- Film Former



RESEALER

- Revives Look

FEATURES

- Easier to clean and maintain
- Solvent-based
- Rain-safe after 90 minutes
- Works between 60°F (16°C) and 85°F (29°C)
- Offered in 1-gallon container and 5-gallon pail

HELPS RESIST

- Corrosion from de-icing salt
- Effects from UV rays
- Motor oil and grease stains



Signature SERIES

WATER-BASED SEALERS

NATURAL STONE

ZERO GLOSS

**+COLOR
ENHANCER**



Gator Seal Signature Series for Natural Stone is a color enhancer and is made of silicone-based polymers. This sealer penetrates deep into natural stone, reducing oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

FEATURES

- Non film-former
- Vibrant color enhancer
- Apply on dry surface only
- Works at above 40°F (4°C)
- Rain-safe after 24 hours
- Easier to clean and maintain
- Water-based, Zero Gloss
- For use on salt-water pool patio areas
- Darkens color (wet look)
- UV-resistant
- Stain protection
- Offered in 1-gallon container and 5-gallon pail

For natural stone such as granite, slate, marble, limestone, travertine, sandstone, flagstone and bluestone

NATURAL LOOK

NATURAL LOOK FINISH, ZERO GLOSS


**MULTI-
PURPOSE**



Gator Seal Signature Series Natural Look is made from fluorochemical polymers. This sealer penetrates deep into concrete pavers, walls, masonry and natural stones, reducing oil and dirt penetration, as well as protecting them from the corrosion of de-icing salt.

FEATURES

- Non film-former
- Applicable on damp surfaces
- Works above 32°F (0°C)
- Rain-safe after 24 hours
- Zero VOC
- Water-based sealer
- Helps resist stains up to 10 years
- Offered in 1-gallon container and 5-gallon pail



WATER-BASED SEALERS FOR DRY CAST CONCRETE PAVERS

COMMON FEATURES FOR ALL HYBRID SEALERS

- Helps resist corrosion from de-icing salt, effects from UV rays, motor oil and grease stains
- Works above 40°F (4°C)
- Film former
- Joint stabilizer
- Will not discolor
- Rapid Installation
- Low VOC
- Rain-safe after 24 hours
- Offered in 1-gallon container and 5-gallon pail



HYBRID HIGH GLOSS 1

+COLOR ENHANCER

FEATURES

- High-gloss finish
- Vibrant color enhancement

HYBRID HIGH GLOSS 2

FEATURES

- High gloss
- No color enhancement

HYBRID LOW GLOSS 3

+COLOR ENHANCER

FEATURES

- Low-gloss finish
- Vibrant color enhancement

HYBRID LOW GLOSS 4

FEATURES

- Low gloss
- No color enhancement

GATOR SEAL CHART



	Hybrid High Gloss +COLOR ENHANCER	Hybrid Low Gloss +COLOR ENHANCER	Hybrid High Gloss	Hybrid Low Gloss	Wet Look High Gloss Vibrant Color Enhancer	Satin Look Low Gloss Subtle Color Enhancer	Natural Stone Zero Gloss + COLOR ENHANCER	Natural Look Natural Look Finish, Zero Gloss MULTI-PURPOSE
Formulation	Water-Based	Water-Based	Water-Based	Water-Based	Solvent-Based	Solvent-Based	Water-Based	Water-Based
Finish	High Gloss	Low Gloss	High Gloss	Low Gloss	High Gloss	Low Gloss	Zero Gloss	Zero Gloss
Color Enhancer	Vibrant	Vibrant	None	None	Vibrant	Subtle	Vibrant	None
Joint Stabilizer	✓	✓	✓	✓	✓	✓		
Film-Former	✓	✓	✓	✓	✓	✓		
Can be applied on Damp Surface	✓	✓	✓	✓				✓
Rain-Safe After	24 hours	24 hours	24 hours	24 hours	90 minutes	90 minutes	24 hours	24 hours
Dry Cast Concrete Paver	✓	✓	✓	✓	✓	✓		✓
Natural Stone							✓	✓
Masonry	✓	✓	✓	✓				✓
Before								
After								
Before								
After								



FLEXLOCK
BY ALLIANCE DESIGNER PRODUCTS
Flex-lock.com