



GATOR BASE SCREWS

TDS Revision Date (dd/mm/yyyy): 24/01/2022

TECHNICAL DATA SHEET


Update: January 24, 2022
Make sure you have an updated technical data sheet on hand.
Canada and U.S. dial **1-855-847-7767** or (450) 624-1611

Description: Fastening **Gator Edge** with the **GATOR BASE SCREW** through the **Gator Base** reinforces the outside perimeter, creating a strong lateral support. **GATOR BASE SCREWS** are a required component on any **Gator Base** install.

- Features:**
- Use with all **Gator Base** installation
 - Use with all the Gator Edges: **Rigid and Flex, Mini** and **Tile**
 - Reinforces the outside perimeter
 - Creates a strong lateral support
 - Locking all components into one
 - Use **GATOR BASE SCREWS** to fasten **Gator Edge** to **Gator Base**

For use on: Use **GATOR BASE SCREWS** to fasten **Gator Edge** to **Gator Base**. Locks all components into one

Installation instructions:

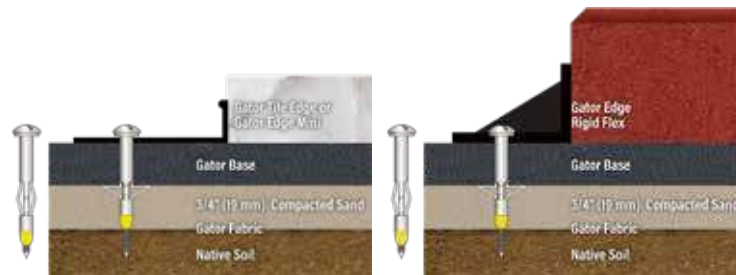

- STEP 1 It can be screwed either before or after the paver installation.
- STEP 2 Ensure **Gator Edges** are installed firmly against the pavers. The **Gator Base** must be 6" (15 cm) wider on all sides than the paved area.
- STEP 3 When using **GATOR BASE SCREWS**, install one screw at every second hole and every junction of the edges to ensure continuous lateral support.



Packaging:	Product	Units per Package	Package per Box
	Gator Base Screws	1/8 LD HOLLOW ANCHOR (50 UNITS)	20



Flexlock
 1800 Berlier st. suite 200, Laval, Quebec, Canada H7L 4S4
 Tel.: 450 624-1611 Fax : 450 624-1622 Toll free : 1 866-212-1611
 www.flex-lock.com - E-mail : info@flex-lock.com